

# PORTABLE AIR INFLATOR PB265ES

TECHNICAL SPECIFICATION

# VIKOMA

boom ancillaries



## PORTABLE AIR INFLATOR PB265ES

### Application

The Vikoma portable air inflation units may be used on all Vikoma beach or vessel deployed boom systems. The units are also suitable for floating storage tanks. Each inflation unit comes with five metres of deflation hose.

### Available Models

- AB/0078 A7 push-in adaptor
- AB/0079 XG push-in adaptor
- AB/0080 Monsun MK XII type adaptor

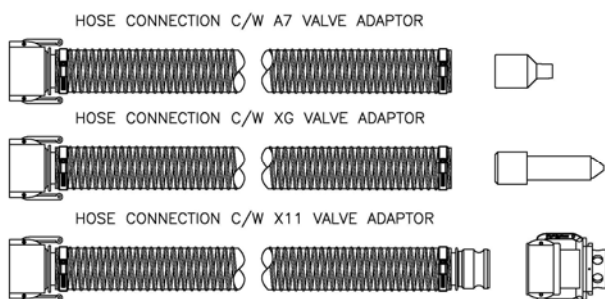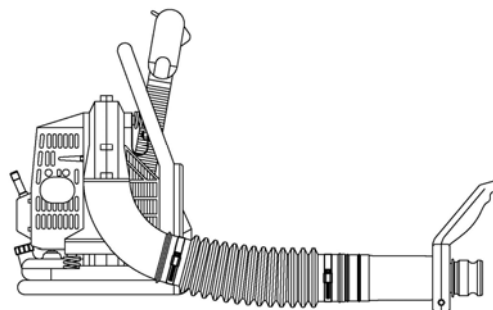

### Construction

Aluminium castings, pressed steel sheet sections, rigid plastic.

### Engine

- Single cylinder air cooled two-stroke petrol.
- Engine displacement 25.4cm<sup>3</sup>
- Carburettor diaphragm
- Fuel tank capacity 0.66 litre
- Average air volume 9.3m<sup>3</sup>/min
- Max engine speed 7000 rpm

### Starting

Pull start with electronic ignition.

### Throttle

PB265ES back pack models have a separate arm mounted throttle and a handle at the hose connection point for ease of use during deployment operations.

### Dimensions (unit only)

- Length 83cm
- Width 35cm
- Height 47cm
- Weight 7Kg (dry)

### Standard Ancillaries

- 5m flexible hose with quick release coupling at one end and inflation adaptor at the other
- Operation and maintenance manual

### Optional Accessories

- Spares kit (SK/0727)