

# PORTABLE AIR INFLATOR PB250

TECHNICAL SPECIFICATION


# VIKOMA

boom ancillaries

## PORTABLE AIR INFLATOR PB250

### Application


The Vikoma portable air inflation units may be used on all Vikoma beach or vessel deployed boom systems. The units are also suitable for floating storage tanks. Each inflation unit comes with five metres of deflation hose.

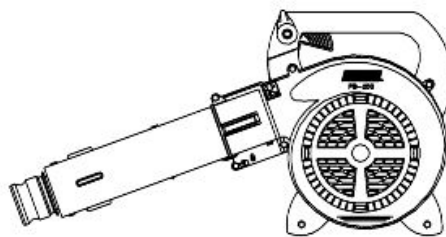

### Available Models

- AB/0057 A7 push-in adaptor
- AB/0058 XG push-in adaptor
- AB/0059 Monsun MK XII type adaptor

HOSE CONNECTION C/W A7 VALVE ADAPTOR



HOSE CONNECTION C/W XG VALVE ADAPTOR



HOSE CONNECTION C/W X11 VALVE ADAPTOR



### Construction

Aluminium castings, pressed steel sheet sections, rigid plastic.

### Engine

- Single cylinder air cooled two-stroke petrol.
- Engine displacement 25.4cm<sup>3</sup>
- Carburettor diaphragm
- Fuel tank capacity 0.47 litre
- Average air volume 11m<sup>3</sup>/min
- Max engine speed 7400 rpm

### Starting

Pull start with electronic ignition.

### Throttle

PB250 hand held models have a throttle trigger incorporated into the handle with three position throttle lock for ease of use during deployment operations.

### Dimensions (unit only)

Length	23cm
Width	33cm
Height	34.5cm
Weight	4.5Kg

### Standard Ancillaries

5m flexible hose with quick release coupling at one end and inflation adaptor at the other  
Operation and maintenance manual

### Optional Accessories

Spares kit (SK/0735)